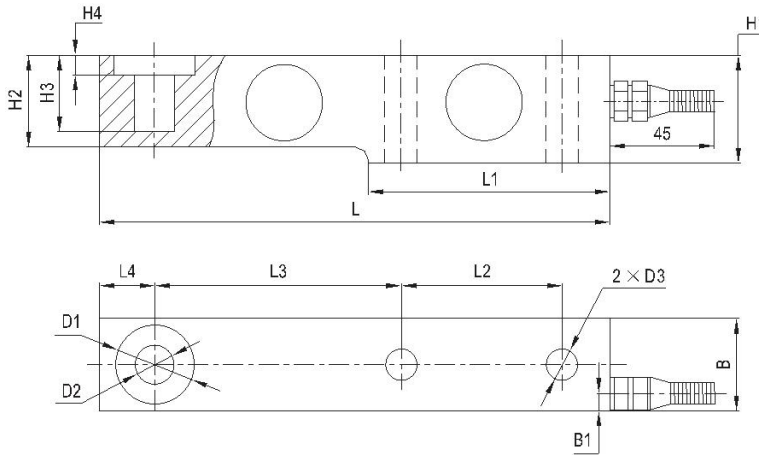



地上衡、配料秤、料斗秤、
平面台秤
Floor scale, blending scale,
hopper scale, platform scale

E _{max} [t]	L	L ₁	L ₂	L ₃	L ₄	H ₁	H ₂ /B	B ₁	H ₃	H ₄	D ₁	D ₂	D ₃
0.5,1,2,3	203	95	64	98	22	43	36.6	7	30.5	8	ø32	ø16	ø13
5,7.5,8	235	110	66	124	22	52	48	7	30	12	ø38	ø22	ø21
10,15	279	133	82	140	32	67	60	8.5	20	8.5	ø48	ø32	ø28
20,25	318	153	89	159	38	82.5	70	9.5	24	9.5	ø54	ø38	ø34

Specifications 技术说明 Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)


Item 项目	Unit 单位	Parameter 参数	
Accuracy class to OIML R60 精度等级		C2	C3
Maximum capacity (E_{max}) 额定载荷	t	0.5,1,2,3,5,7.5,8,10,15,20,25	
Minimum LC verification interval (V _{min})最小检定分度值	% of E _{max}	0.0200	0.0100
Sensitivity (C_n) / Zero balance 灵敏度/零点平衡	mV/V	2.0 ± 0.002 / 0 ± 0.02	
Temperature effect on zero balance (TK ₀) 温度对零点影响	% of C _n /10K	±0.02	±0.0170
Temperature effect on sensitivity (TK _c) 温度对灵敏度影响	% of C _n /10K	±0.02	±0.0170
Hysteresis error (d _{hy}) 滞后误差	% of C _n	±0.0270	±0.0180
Non-linearity(d _{lin}) 非线性误差	% of C _n	±0.0250	±0.0167
Creep(d _{cr}) over 30 min. 蠕变及蠕变恢复	% of C _n	±0.0233	±0.0167
Input (R_{ic}) & Output resistance (R_o) 输入&输出电阻	Ω	400 ± 10 & 352 ± 3	
Nominal range of excitation voltage (B_u) 额定电压	V	5~12	
Insulation resistance (R _{is}) at 50Vdc 绝缘电阻	MΩ	>5000	
Service temperature range (B _{tu}) 工作温度	℃	-30...+70	
Safe load limit (E _L) & Breaking load (E _d) 安全承载&破坏载荷	% of E _{max}	150 & 300(0.5t~5t);120&200(8t~25t)	
Protection class according to EN 60 529 (IEC 529)保护等级		500kg:IP67;1t~25t:IP68	
Material :Measuring element 材料: 测量元件 Cable fitting 电缆配件 Cable sheath 电缆护套		0.5t...5t:Stainless or alloy steel 10t...25t: alloy steel Stainless steel or nickel-plated brass PVC	
Maximum capacity (E _{max}) 额定载荷	t	0.5,1,2	3 5 7.5/8 10 15 20 25
Deflection at E _{max} (s _{nom}) ,approx最大载荷下的变形量	mm	<1	<1.2 <1.5 <1.2 <1.5
Weight(G),approx 重量	kg	2.2	4.2 8.0 11.5
Cable 电缆: Diameter 直径: ø6mm Length长度	m	2.6 3.5	5.2 7 12 12

SBA 总装图 A

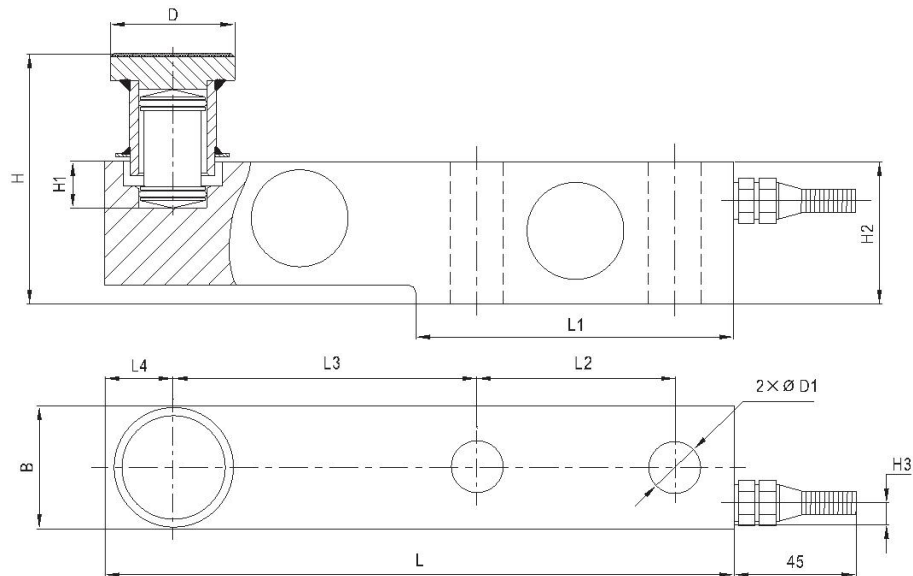

Emax[t]	L	L1	L2	L3	L4	B	H	H1	H2	H3	D	D1
0.5,1,2,3	203	95	64	98	22	36.6	58	30.5	43	7	Ø 35	Ø 13
5,7.5,8	235	110	66	124	22	48	81	30	52	7	Ø 42	Ø 21
10,15	279	133	82	140	32	60	128	20	67	8.5	Ø 57	Ø 28
20,25	318	153	89	159	38	70	144	24	82.5	9.5	Ø 70	Ø 34

SBA 总装图 B

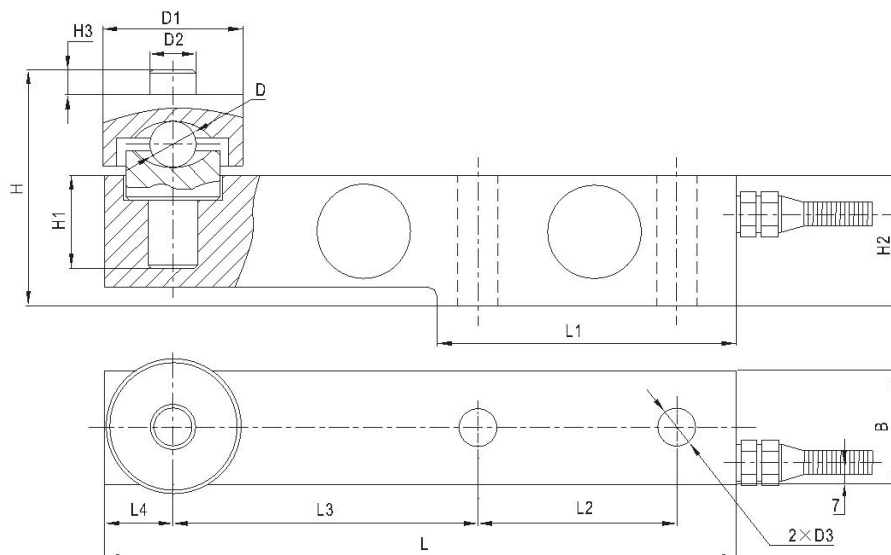

Emax[t]	L	L1	L2	L3	L4	B	H	H1	H2	H3	D	D1	D2	D3
0.5,1,2,3	203	95	64	98	22	36.6	79	30.5	43	9	Ø 16	Ø 45	Ø 15	Ø 13
5,7.5,8	235	110	66	124	22	48	104	30	52	10	Ø 25	Ø 52	Ø 21	Ø 21